RCC115 • 15" Craft Clear Ice Machine


Stainless Solid   Integrated Solid

Craft Cube:

BrightShield® protects against viruses, bacteria, mold, & mildew.

Key Features

- **Industry-exclusive slow melting clear ice cubes perfect for whiskeys and cocktails**
- **High production rate of 120 cubes per day**
- **Industry leading BrightShield® antimicrobial lighting creates a clean environment for ice**
- Designed for built-in or freestanding applications
- Easy clean process only lasts 45 minutes
- Environmentally friendly R600a refrigerant (1.976 oz)
- Factory installed drain pump
- Field reversible door is shipped right-hand hinged

- Four adjustable leveling legs
- High efficiency variable speed compressor with 1.7 running amps
- Indicator alert notifies when cleaning is needed
- Integrated model requires ¾" custom door panel and handle (not supplied by U-Line)
- Makes square cubes 1 ⅞" L x 1 ⅞" W x 1 ¼" H
- Silent setting temporarily suspends ice making for 3 hrs
- Soft close door with articulating hinge
- Stainless steel handle (⅞" diameter)

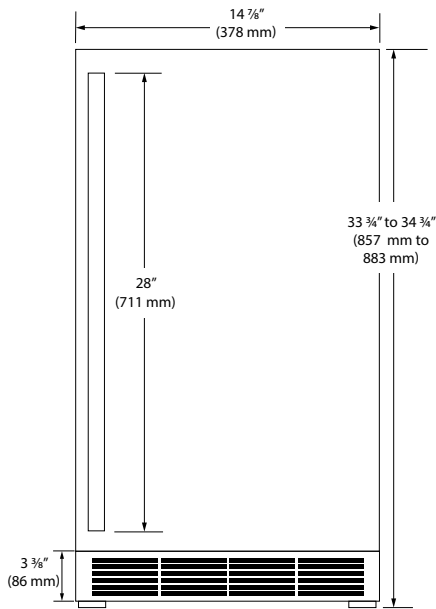## Model Details

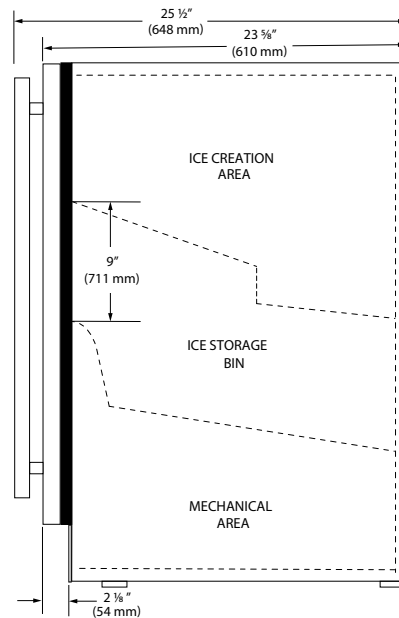| Model	Description	Voltage/Hz	Shipping Weight
URCC115-SS81A	Craft Clear Ice Machine 15" Reversible Hinge Stainless Solid	115v / 60hz	125 lb
URCC115-IS81A	Craft Clear Ice Machine 15" Reversible Hinge Integrated Solid	115v / 60hz	121 lb

Accessories

Accessories	Description	Shipping Weight
ULAWATERHOOKUP	Braided Water Supply Line Kit	2 lb
80-55667-00	Clear Ice Machine Cleaner (Single 4 oz. Bottle)	1 lb

Front

14 ⅞"
(378 mm)

33 ¾" to 34 ¾"
(857 mm to 883 mm)

28"
(711 mm)

3 ⅜"
(86 mm)

Side

25 ½"
(648 mm)

23 ⅝"
(610 mm)

ICE CREATION AREA

9"
(711 mm)

ICE STORAGE BIN

MECHANICAL AREA

2 ⅛"
(54 mm)

Top

21 ½"
(537 mm)

38 ⅞"
(987 mm)

1 ⅞"
(48 mm)

17 ⅜"
(441 mm)
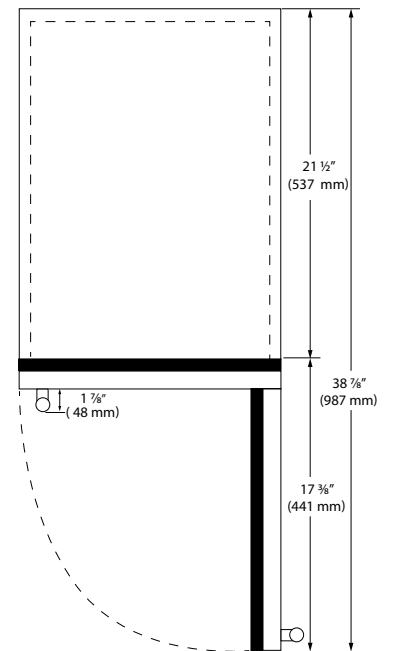
Specifications

Model	RCC115
Amps: Running	1.7
Dimensions: Product Depth	23 ⅝"" / 600 mm
Dimensions: Product Height	33 ¾" to 34 ¾"" / 857 mm to 883 mm
Dimensions: Product Width	14 ¾" / 375 mm
ENERGY STAR	No
Ice Production Per Day	120 Cubes
Panel Height	30 ⁷/₁₆" / 773mm
Panel Thickness	¾" 20mm
Panel Type	Solid Panel
Panel Width	14 ¾" / 375 mm
Product Weight: Max	122 lb
Refrigerant Type:	R600a

Back

Drain

4 ⅛"
(105 mm)

6 ⅞"
(175 mm)

1 ¼"
(32 mm)

Water In

3 ½"
(89 mm)

1 ¾"
(44 mm)

3 ½"
(89 mm)

Power Cord

Cabinet Cut-Out

Preferred location for electrical outlet is in adjacent cabinet.

⅝"
(16 mm)

34" to 35"
(864 mm to 889 mm)

24"
(610 mm)

7"
(178 mm)

4"
(102 mm)

15"
(381 mm)
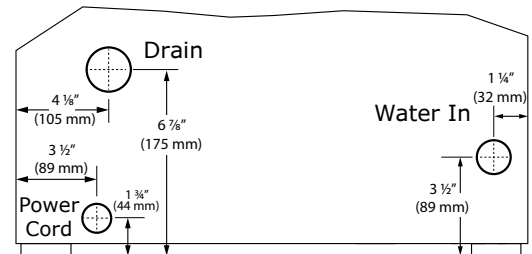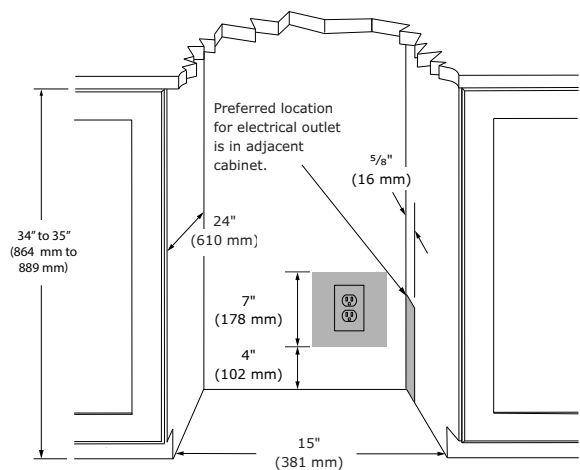
Installation Notes

- No additional clearance is needed for ventilation
- Do not obstruct front grille air flow

Warranty

- 1 Year (parts & labor) / 5 year sealed system (parts)

+ **Additional 1 year (parts & labor) warranty at no cost with product registration.**

See complete warranty for details

2 year warranty

Please visit u-line.com to view this model's User Guide & Service Manual. All Specifications are subject to change without notice.

8900 North 55th Street • Milwaukee, Wisconsin 53223 USA • +1.414.354.0300 • sales@u-line.com • u-line.com