

5 SERIES 36"W. INDUCTION RANGE

Viking 5 Series - VIR

COMMERCIAL-TYPE COOKING POWER

- MagneQuick[™] Induction Power Generators utilize magnetic energy for superior power, responsiveness, and efficiency
- Power management induction system provides a boost of superior power on all elements for faster boil times
- Large 9" induction elements each provide up to 3,700 watts of power
- Six large 9" 3,700–2,300-watt induction elements
- Simmer setting is perfect for gentle melting or keeping cooked food warm
- Heavy-duty BlackChrome[™] knobs and square bezels shipped standard
- One of the largest oven cavities in the industry
- EXCLUSIVE patented Vari-Speed Dual Flow™ Convection System has the largest convection fan in the industry; the 8-1/2" fan works bi-directionally for maximum airflow and excellent cooking results
- Concealed 10-pass dual bake element provides precise temperature control
- Large 10-pass broiler with heat reflector
- Rapid Ready[™] Preheat provides one of the fastest preheat times, meaning less wait time for the oven to preheat
- Oven has six porcelain-coated rack positions and comes standard with three oven racks
- EXCLUSIVE Gentle Close™ Door allows door to close slowly
- Three strategically located oven lights provide maximum visibility
- High-performance cooking modes include bake, convection bake, TruConvec convection cooking, convection roast, broil, convection broil, convection dehydrate, and convection defrost



EASY OPERATION AND CLEANUP

- NEW surface graphics on strong, wear-resistant glass ceramic surface for excellent cleanability
- Self-cleaning porcelain oven
- Concealed 10-pass dual bake element makes for easy cleanup of the oven cavity

MODEL NUMBER

VIR53626B – 36"W. Induction Range; six elements

ACCESSORIES

- BG8536SS 8"H. backguard for 36" range
- HS24536SS high shelf for 36" range
- P24CSTSS countertop side trim (2 pieces)
- P36CRTSS countertop rear trim for 36" range
- P36CBF4SS curb base and custom curb base front for 36" range

COLOR FINISHES

- Stainless Steel (SS)
- Available in Cast Black (CS), Damascus Gray (DG), and Slate Blue (SB)

WARRANTY

- 2-year full complete product
- 90-day full cosmetic parts such as glass, painted items and decorative items
- 5-year limited induction element components




5 SERIES 36"W. INDUCTION RANGE

Viking 5 Series - VIR

36"W. INDUCTION RANGE	
DESCRIPTION	VIR53626B
Overall Width	35-7/8" (91.1 cm)
Overall Height from Bottom	Base Height To top of glass frame – minimum 35-7/8" (911 cm) to maximum 37" (94 cm); legs adjust 1-1/8" (2.9 cm) Additions to Base Height To top of island trim – add 1" (2.5 cm); to top of backguard – add 8" (20.3 cm) To top of high shelf – add 24" (61.0 cm)
Overall Depth from Rear	To end of side panel – 24-7/8" (63.2) To front of door – 26-1/8" (66.4 cm) To end of door handle – 28-3/4" (73 cm)
Electrical Requirements	240-208VAC, 60 Hz electrical connection box on product, connect with locally supplied 3-wire, flexible cord or "pigtail" rated 50 amp 125-250VAC minimum. Cord must be agency approved for use with household electric ranges.
Circuit Breaker	50 amp dedicated circuit
Surface Burner/Element Rating	Left Front: 3,700-watt boost/2,300 watts Left Rear: 3,700-watt boost/2,300 watts Center Front: 3,700-watt boost/2,300 watts Center Rear 3,700-watt boost/2,300 watts Right Front: 3,700-watt boost/2,300 watts Right Rear: 3,700-watt boost/2,300 watts
Oven Interior Dimensions	Overall Width – 30-5/16" (76.9 cm) Height – 16-1/2" (41.9 cm) Depth – 19-1/2" (49.5 cm) Overall Size – 5.6 cu. ft. AHAM Standard* – 4.9 cu. ft. 3 racks, 6 rack positions
Approximate Shipping Weight	525 lb. (193.2 kg)

Please do not prepare installation from brochure data only. See installation instructions for important clearance/installation information. **The AHAM Standard for measuring oven capacity subtracts the door plug and convection baffle dimension from the total oven volume. 208V ratings – Time required for some functions may be extended due to less wattage.

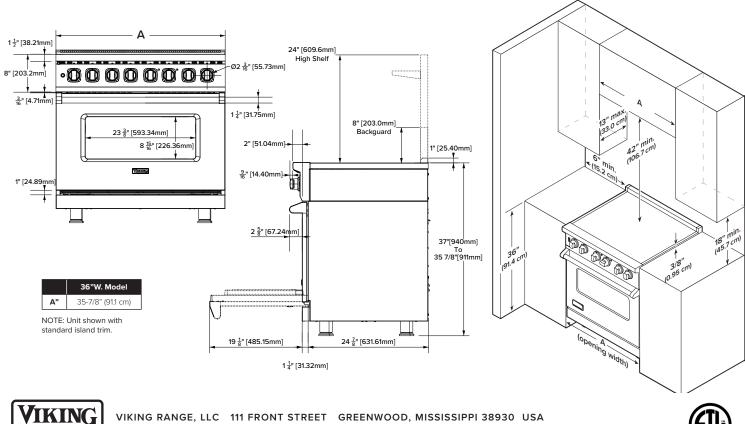

For detailed product information, model numbers, or to request a quote call 1-888-845-4641 or visit vikingrange.com © 2023 Viking Range, LLC All rights reserved. Specifications subject to change without notice.